


Guidelines

- Piles used on the face or for anchoring should meet ASTM D7258.
- Plastic lumber sheet piles with our “V” tongue & groove are recommended.
- There should be a hot-dipped galvanize coating on all rods, anchor hardware, and fasteners.
- Weep holes should be no smaller than 1.5” in diameter. The filter fabric and gravel filter material should be installed no more than 5’ from the center, at roughly 6” above the berm line or 6” above the Mean Low Water. Weep holes will need outlet protection if they are exposed to wave action.
- Wing walls or returns are required on the bulkhead ends to prevent flanking. Riprap is highly recommended at the wingwall toe and end.

GENERAL ARRANGEMENT THROUGH BULKHEAD (NO SCALE)

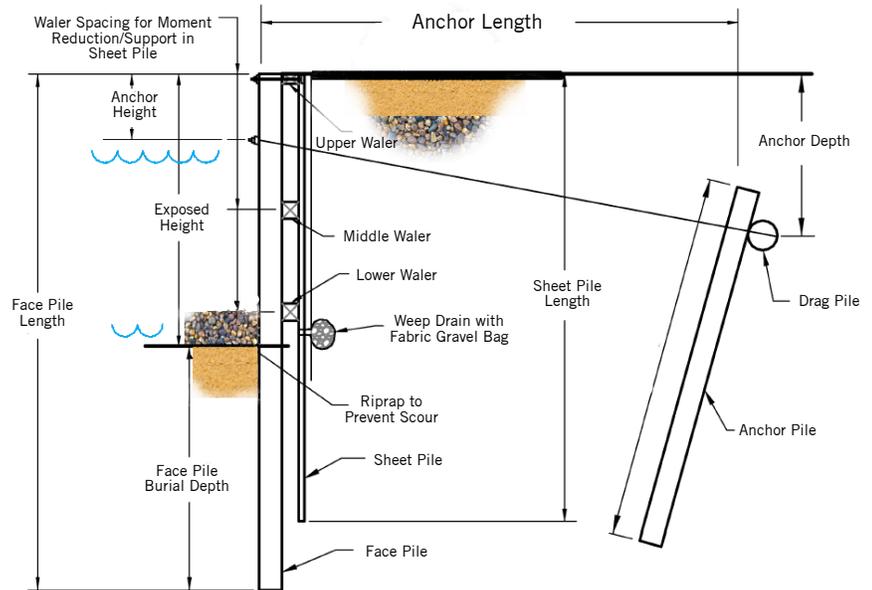

GENERAL ARRANGEMENT- BULKHEAD

